

Double Flow Console


PRODUCT SHEET

KSDF-28 DN4.0 / KSDF-36 DN4.0 / KSDF-45 DN4.0



KI-03 S

Recommended controller




Product certified by: 



FEATURES

Model	KSDF-28 DN4.0	KSDF-36 DN4.0	KSDF-45 DN4.0
Cooling capacity	2,80 kW	3,60 kW	4,50 kW
Heating capacity	3,20 kW	4 kW	5 kW
Heating power input	20 W	25 W	35 W
Airflow	229/430/510 m ³ /h	229/430/510 m ³ /h	400/512/660 m ³ /h
Sound pressure	27/33/39 dB(A)	27/33/39 dB(A)	36/39/42 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"
Drain tube diameter	Ø16 mm	Ø16 mm	Ø16 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Interconnection cable	3x2,50 mm ²	3x2,50 mm ²	3x2,50 mm ²
Com. bus shielded	3x0,75 mm ²	3x0,75 mm ²	3x0,75 mm ²

WIRING DIAGRAM

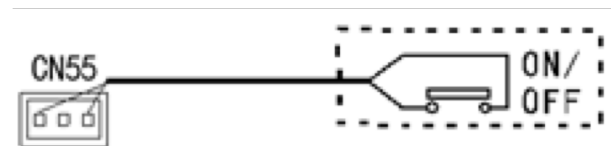
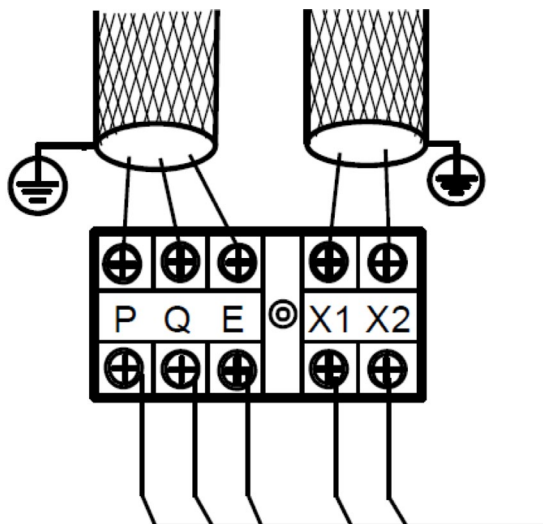


Power supply terminal

NOTES:

- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

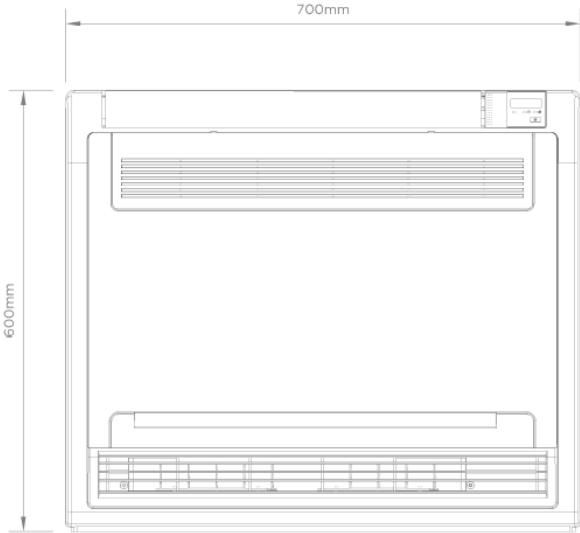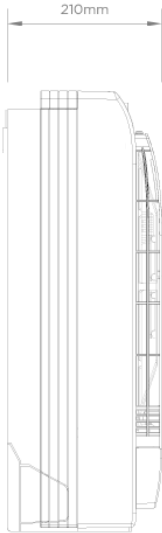Model	KSDF-28 DN4.0	KSDF-36 DN4.0	KSDF-45 DN4.0
			
Weight	15 kg	15 kg	15 kg

INSTALLATION

