


# Double Flow Console

# PRODUCT SHEET




KID-05 S  
Standard controller

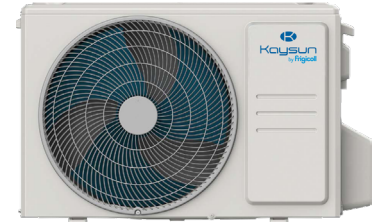

## FEATURES

Model	KSDA-26 DVR14-2
Cooling capacity	2,60 kW
Cooling power input	800 W
Heating capacity	3,51 kW
Heating power input	1.000 W
ErP Classification cold/heat	A++ / A+
Airflow (indoor)	490/580/650 m <sup>3</sup> /h
Sound pressure (indoor)	27/34/37 dB(A)
Airflow (outdoor)	2.000 m <sup>3</sup> /h
Sound pressure (outdoor)	54 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Max. input	9 A
Power wiring (outdoor)	(2+T)x1,50 mm <sup>2</sup>
Communication wiring	(3+T)x1 mm <sup>2</sup>

## WIRING DIAGRAM

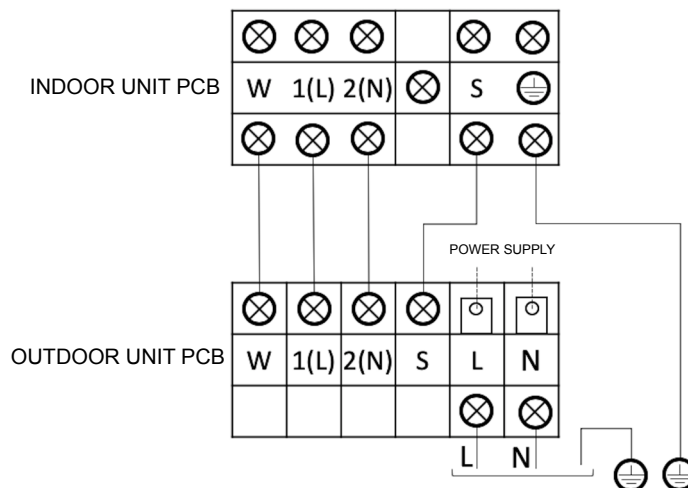


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.  
 (2) The images on this sheet are indicative and may be different from the final machine.

## COOLING CONNECTION

Model	KSDA-26 DVR14-2	
Refrigerating pipes	Ø1/4" / Ø3/8"	
Refrigerant charge / Additional charge	0,72 kg / 0,012 kg	
Indoor drain pipe	Ø16	
Max. pipe length (A)	25 m	
Max. level difference (B)	10 m	





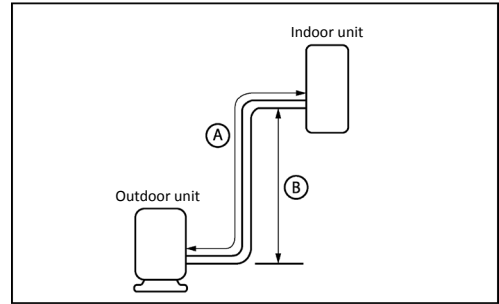


## DIMENSIONS & WEIGHT INDOOR



Model	KSDA-26 DR14-2
Width	794 mm
Height	621 mm
Depth	200 mm
Weight	14,90 kg

## DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-26 DVR14
Width	765 mm
Height	555 mm
Depth	303 mm
Weight	24,60 kg

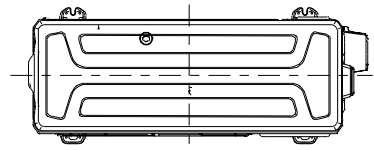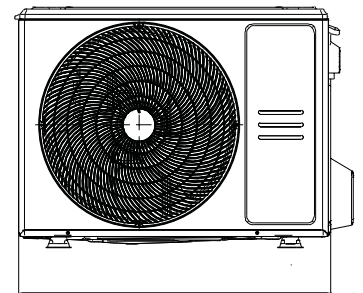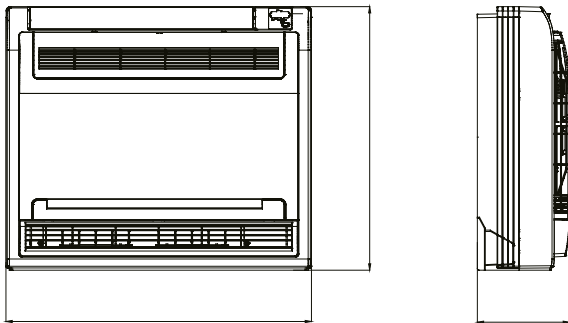

## INSTALLATION

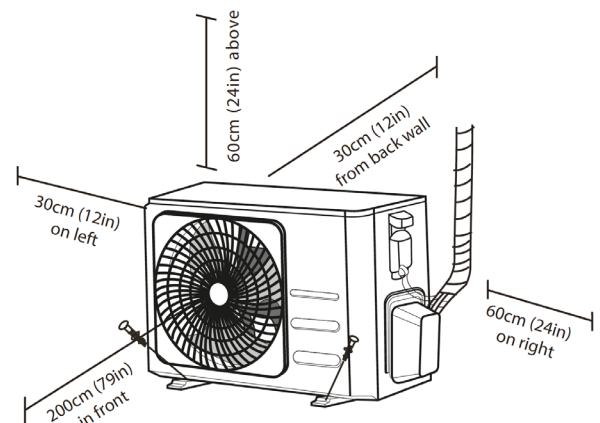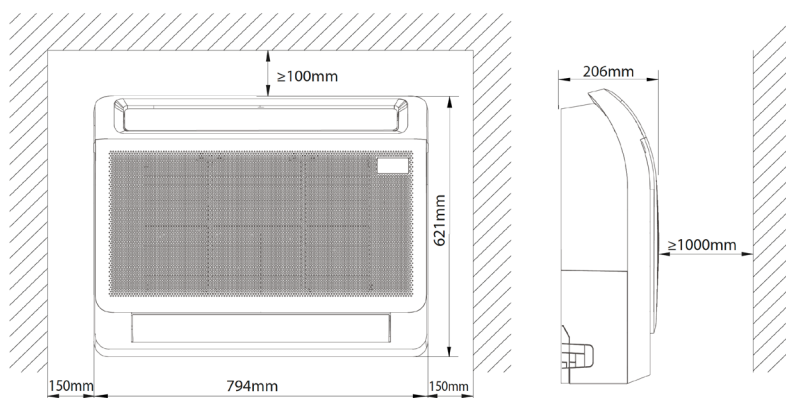


# Double Flow Console

# PRODUCT SHEET




KID-05 S  
Standard controller

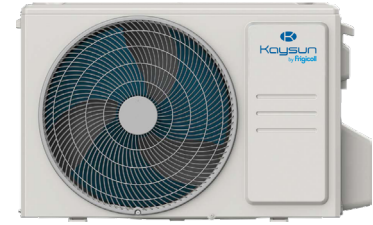

## FEATURES

Model	KSDA-35 DVR14-2
Cooling capacity	3,52 kW
Cooling power input	1.000 W
Heating capacity	4,69 kW
Heating power input	980 W
ErP Classification cold/heat	A++ / A+
Airflow (indoor)	490/580/650 m <sup>3</sup> /h
Sound pressure (indoor)	27/34/37 dB(A)
Airflow (outdoor)	2.200 m <sup>3</sup> /h
Sound pressure (outdoor)	54 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Max. input	9 A
Power wiring (outdoor)	(2+T)x1,50 mm <sup>2</sup>
Communication wiring	(3+T)x1 mm <sup>2</sup>

## WIRING DIAGRAM

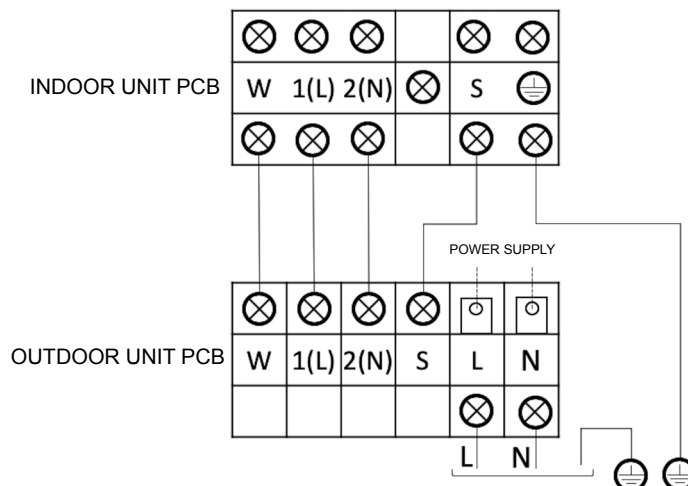


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.  
 (2) The images on this sheet are indicative and may be different from the final machine.

## COOLING CONNECTION

Model	KSDA-35 DVR14-2	
Refrigerating pipes	Ø1/4" / Ø3/8"	
Refrigerant charge / Additional charge	0,72 kg / 0,012 kg	
Indoor drain pipe	Ø16	
Max. pipe length (A)	25 m	
Max. level difference (B)	10 m	





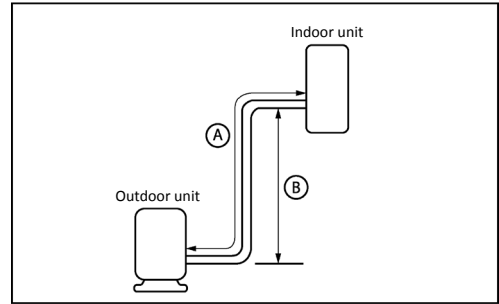


## DIMENSIONS & WEIGHT INDOOR



Model	KSD-35 DR14-2
Width	794 mm
Height	621 mm
Depth	200 mm
Weight	14,90 kg

## DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-35 DVR13
Width	765 mm
Height	555 mm
Depth	303 mm
Weight	26,60 kg

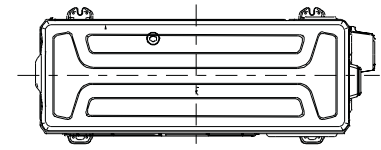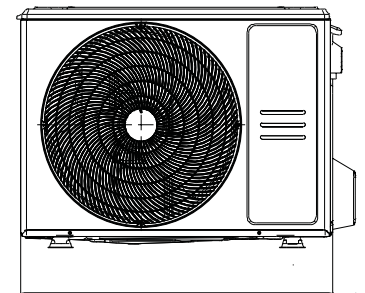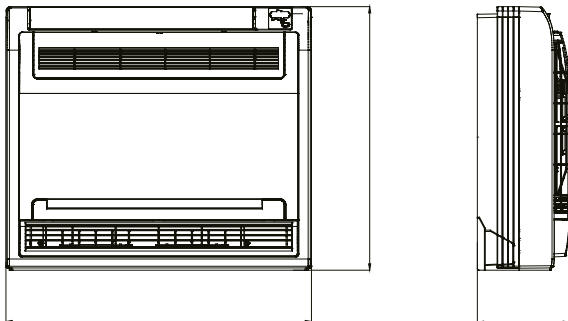

## INSTALLATION

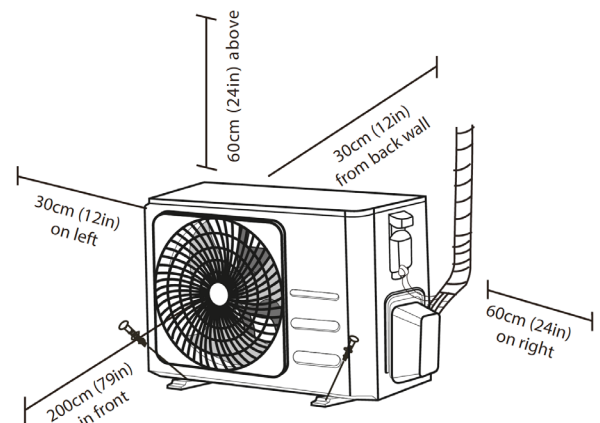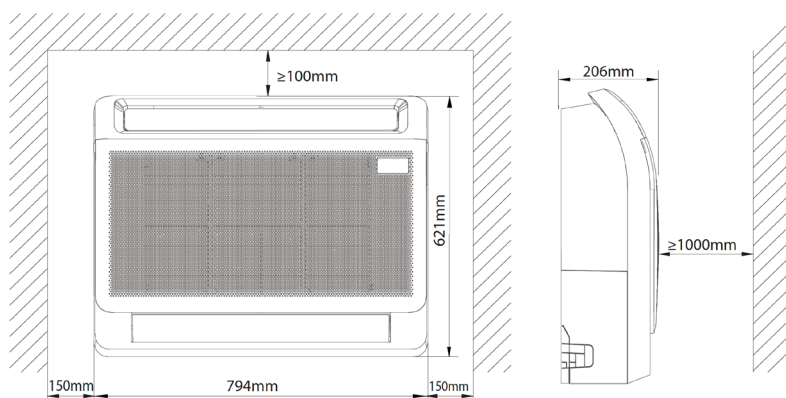


# Double Flow Console

# PRODUCT SHEET




KID-05 S  
Recommended controller

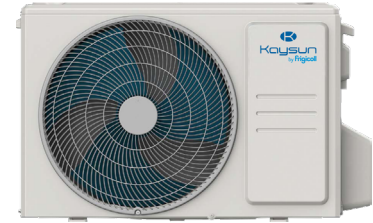

## FEATURES

Model	KSDA-52 DVR14-2
Cooling capacity	4,98 kW
Cooling power input	1.500 W
Heating capacity	5,28 kW
Heating power input	1.420 W
ErP Classification cold/heat	A++ / A+
Airflow (indoor)	600/690/780 m <sup>3</sup> /h
Sound pressure (indoor)	32/38/41 dB(A)
Airflow (outdoor)	2.100 m <sup>3</sup> /h
Sound pressure (outdoor)	55 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Max. input	13,50 A
Power wiring (outdoor)	(2+T)x1,50 mm <sup>2</sup>
Communication wiring	(3+T)x1 mm <sup>2</sup>

## WIRING DIAGRAM

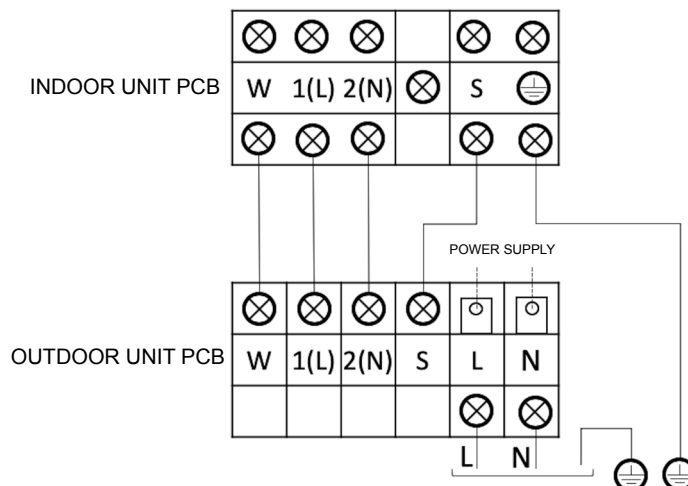


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.  
 (2) The images on this sheet are indicative and may be different from the final machine.

## COOLING CONNECTION

Model	KSDA-52 DVR14-2	
Refrigerating pipes	Ø1/4" / Ø1/2"	
Refrigerant charge / Additional charge	1,15 kg / 0,012 kg	
Indoor drain pipe	Ø16	
Max. pipe length (A)	30 m	
Max. level difference (B)	20 m	





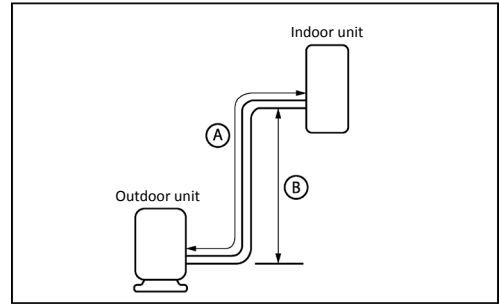


## DIMENSIONS & WEIGHT INDOOR

Model	KSD-52 DR14-2
Width	794 mm
Height	621 mm
Depth	200 mm
Weight	14,90 kg

## DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-52 DVR13
Width	805 mm
Height	554 mm
Depth	330 mm
Weight	32,50 kg

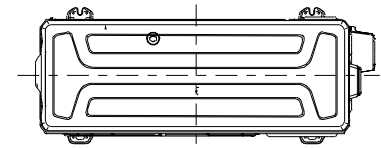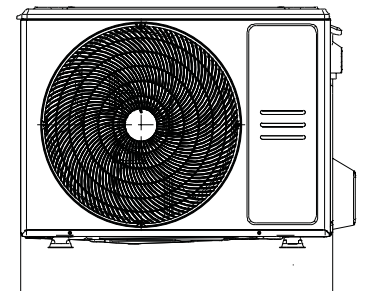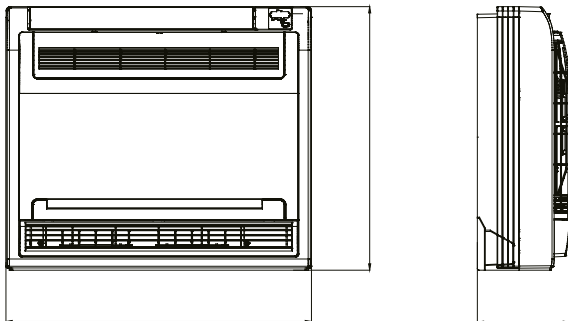

## INSTALLATION

